

SB 15m SUBWOOFER




Description	High power compact subwoofer: 1 x 15" amplified by LA2Xi / LA4X / LA8 / LA12X
Usable bandwidth (-10 dB)	40 Hz - 100 Hz ([SB15_100])
Maximum SPL¹	137 dB ([SB15_100])
Nominal directivity	Standard or cardioid configurations
Transducers	1 x 15" cone driver
Acoustical load	Bass-reflex, L-Vents
Nominal impedance	8 Ω
Connectors	IN: 1 x 4-point speakON LINK: 1 x 4-point speakON
Rigging and handling	2 coupling bars and 2 locking tabs 1 pole mount - 35 mm 2 handles
Weight (net)	36 kg / 79.4 lb
Cabinet	Premium grade Baltic birch plywood
Front	Coated steel grill Acoustically neutral 3D fabric
Rigging components	High grade steel with anti-corrosion coating
Finish	Dark grey brown Pantone 426 C pure white RAL 9010 custom RAL code on special order
IP	IP55



¹ Peak level at 1 m under half space conditions using pink noise with crest factor 4 (preset specified in brackets).

ISOCONTOUR

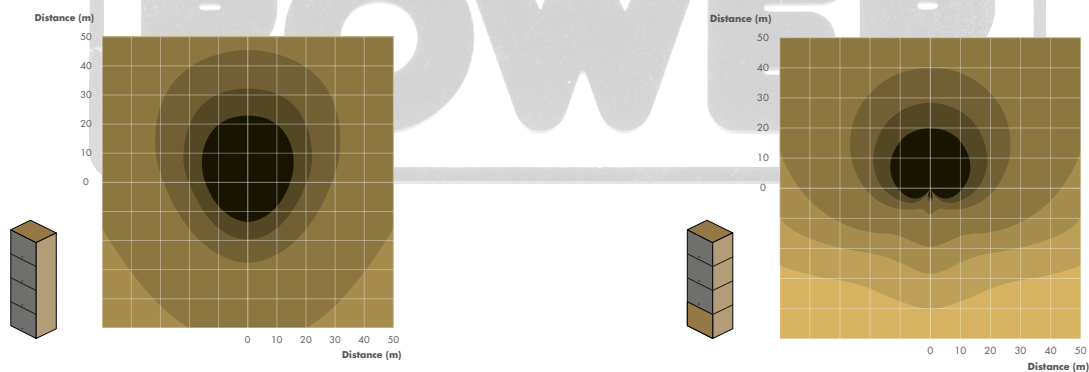

► SPL mapping of a block of four SB15m in standard (left) and cardioid (right) arrangements, using surfaces of equal sound pressure with three dB step colored scale.

DIMENSIONS

