

Arylic

Play and Enjoy Sound Differently

S50 Pro+

User's Manual



Wireless Streaming Preamplifier



WiFi

aptX™ HD

aptX HD



Spotify



AirPlay



Multi-Room



ESS SABRE

www.arylic.com



HOME &
PROFESSIONAL
AUDIO/VISUAL

• MAPNH 8 AGHNA 10433 • THA. 210 3845676 ~ 210 3845272 FAX. 210 3809747 • e-mail: sales@hifipower.gr •

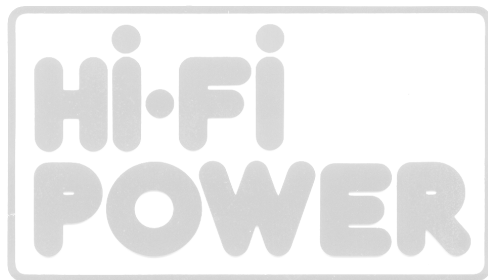



Table of Contents

1. Introduction	1
2. What's in the box	1
3. Main Features	2
4. Specification	3
5. Interface.....	4
6. Remote controller	5
7. Connection diagram	6
8. How to use.....	6
8.1 App download.....	6
8.2 Connection	7
8.2.1 Option 1 - Connection via app.....	7
8.2.2 Option 2 - Connection via LAN	8
8.2.3 Option 3 - Bluetooth pair	8
8.3 App features	9
8.3.1 Device setting	9
8.3.2 To play local storage music.....	9
8.3.3 To play music from NAS	10
8.3.4 To play in line in mode	10
8.3.5 To play in optical in mode	10
8.3.6 To play in bluetooth mode.....	11
8.4 Streaming services	11
8.4.1 Spotify.....	12
8.4.2 AirPlay	12
8.4.3 Qplay	13
8.5 Multiroom and Multizone	13
8.6 Left and right channel.....	14
8.7 Preset	14
8.8 Source mode change	14
8.9 Restore factory setting.....	14
8.10 Firmware update.....	15
9. Play on PC.....	15
9.1 To play music from iTunes on Mac and Windows PC.....	15
9.2 To play music from Windows PC via FooBar2000	16
FAQ	19


1. Introduction

S50 Pro+ is a highend audio streaming preamplifier with network and Bluetooth aptX HD connectivity. Applying S50 Pro+ to your current stereo system will enable you to stream music from your smart device, USB, NAS or streaming services, such as Spotify, Tidal or Qobuz in high resolution by 4STREAM App, AirPlay, Bluetooth or other third party compatible apps. Lots of Hi-Fi hardware components, such as ESS9023 DAC, Cirrus Logic ADC are implemented to make a great sound quality, Adding more units to your home audio system can set up a wireless multiroom or multizone whole house audio system, it will give you totally new and great experience to play and enjoy music.


2. What's in the box




Main Unit x1

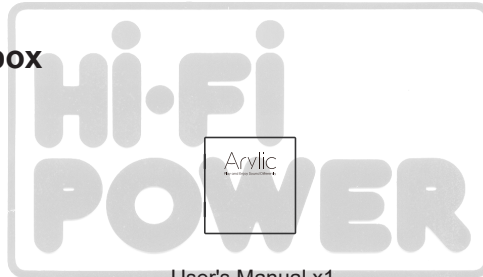

User's Manual x1



2-2RCA Cable x1
2-1RCA Cable x1



Power Adapter x1



Antenna(3dB) x2



Remote Control x1


3. Main Features

- Streaming music via network without distance limitation or Bluetooth5.0 up to 15 meters.
- Bluetooth 5.0 aptX HD for true high resolution music.
- Spotify connect, Airplay, Qplay, DLNA, UPnP streaming protocols supported.
- Support streaming source from online services, smart device memory, USB pen drive, NAS, Bluetooth and line in.
- Multiroom and multizone streaming enabled by multiple units connected in same network.
- All music sources can be restreamed in sync to other models from us.
- Airplay, Spotify Connect, Qplay, DLNA, UPnP protocol and 3rd party app compatible.
- High quality music streaming support, sample rate decoding up to 24bit, 192kHz.
- Coaxial and Optical to provide digital audio output.
- Spotify, Deezer, Tidal, Qobuz, iHeartRadio, TuneIn, Napster, lots of online streaming services integrated to use in the app.
- Free iOS and Android app available.
- Free global online update for new features.
- Full function remote controller to use without cellphone.
- Digital and Analog inputs for more possible external audio input.
- Subwoofer output for external active subwoofer.
- OLED display panel for display info.
- EQ adjustment via app or remote controller.
- Preset playlist is available and short buttons on remote controller for one button play.
- iTunes working with PC streaming.

4. Specification

Connectivity	Wireless network	IEEE802.11 b/g/n 2.4G
	Ethernet	Single 10/100M RJ45
	Bluetooth	5.0 Qualcomm aptX-HD
	USB Host	Play music from USB pen drive
Frequency response		20Hz to 20kHz
Digital output	Coaxial output	
	Optical output	
Analog output	1x RCA, 1x Subwoofer	
Audio input	1x RCA, 1x Optical in	
Power supply	12V/1A	
Decoding	Up to 24bit/192kHz	
Music format	FLAC/MP3/AAC/AAC+/ALAC/APE/WAV	
SNR	110dB	
THD	0.03%	
Remote	IR remote controler	
LED	RED-Standby mode	
Display panel	Status info	
Dimensions	12x11.3x3.7CM(4.72x4.45x1.46in)	
Weight	0.4kg(0.88lb)	

5. Interface

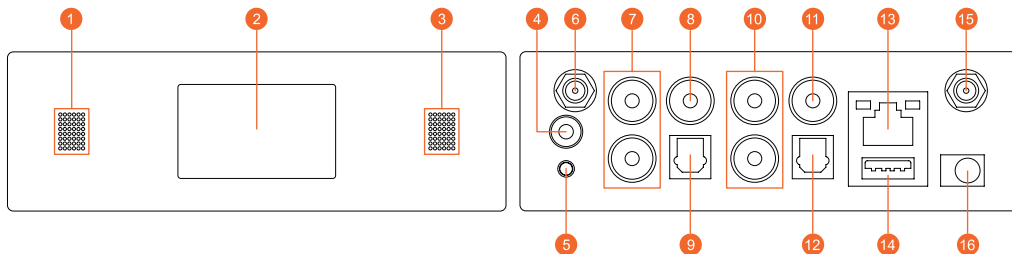


- 1 LED: to show the device status.
- 2 Display Panel: Display status info.
- 3 IR receiver: for remote control.
- 4 Trigger: 12V trigger output to use with other device.
- 5 Reset: short press to reset the device WiFi, long press to restore the device to factory setting (only works in WiFi mode), please change to WiFi mode when the device is in Bluetooth or line input mode.
- 6 Bluetooth antenna: external Bluetooth antenna for better Bluetooth signal strength.
- 7 Line input: for external audio sources from TV, CD player and so on.
- 8 Sub output: to connect active subwoofer.
- 9 OPTICAL input: for digital input source.
- 10 Line output: to provide analog audio to other devices.
- 11 Coax output: to provide digital audio output to amplifiers.
- 12 OPTICAL: digital audio output.
- 13 LAN: Wired connection to your router.
- 14 USB Host : to connect USB pen drive (1024 tracks at most).
- 15 WiFi antenna: external WiFi antenna for better signal strength.
- 16 DC in: 12V/1A DC input.

6. Remote Controller



7. Connection Diagram

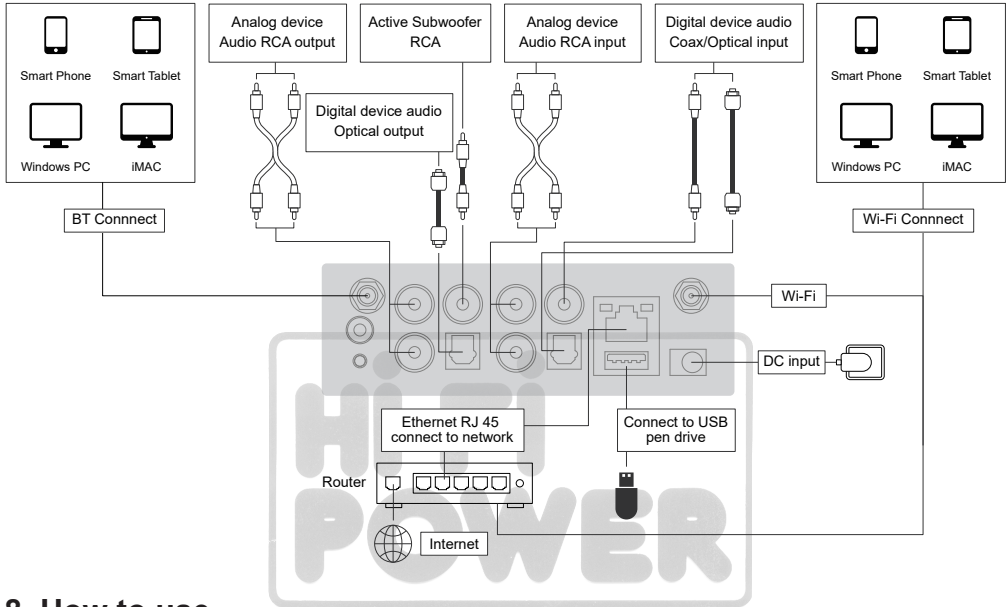

8. How to use

8.1 App Download


Download the 4STREAM application from App Store for iOS based devices and Google Play Store for Android based devices.

The application supports English, Spanish, French, German, Italian, Portugese, Korean, Simplified Chinese, Traditional Chinese and Japanese.







8.2 Connection

8.2.1 Option 1 - Connection via app


1. Power the device.
2. Connect your mobile devices to your network.
3. Go for mobile device WLAN settings> Connect mobile device to hotspot SoundSystem_xxxx you will see a WiFi logo . (short press the reset button if the hotspot is not found).
4. Open the 4STREAM application, follow the guides
5. Choose the 2.4G network (Only 2.4G network will appear), Enter router password>wait for the device to be configured.

*For multiple units connecting to same router, router password will be saved.

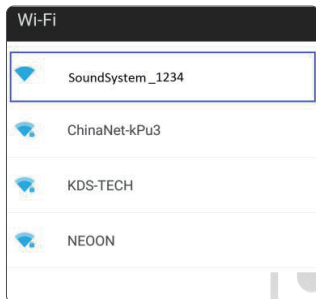

*Attention for Android users.

Different Brand Mobile Phones May ask you to Allow to Use SoundSystem WiFi Network, Please Choose yes, If not, You may Not Able to Set up Successfully.

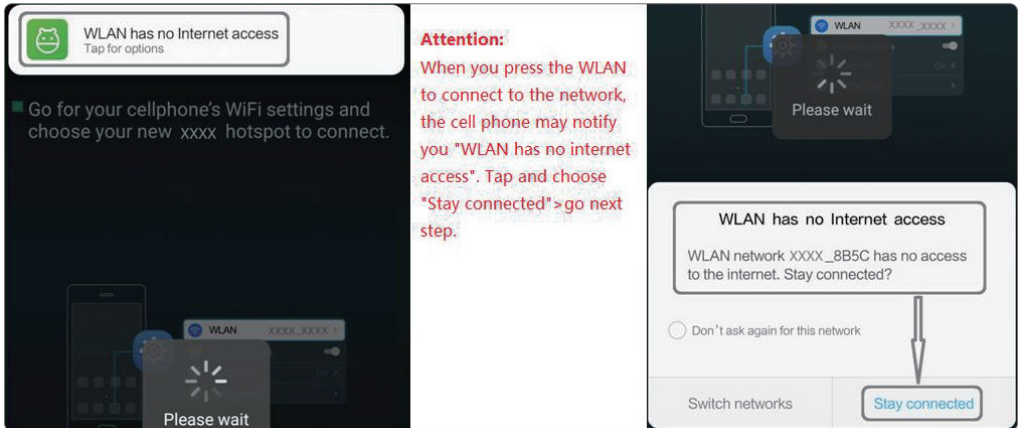

The image shows two screenshots from an Android phone. The left screenshot displays a notification that says "WLAN has no Internet access" with a green cat icon and "Tap for options". Below it, a text box instructs the user to go to their cellphone's WiFi settings and choose a new hotspot. A "Please wait" dialog is overlaid on the phone screen. The right screenshot shows a similar notification, but the text says "WLAN network XXXX_BB5C has no access to the internet. Stay connected?". Below this, there is a radio button option "Don't ask again for this network" and a "Stay connected" button highlighted with a blue border. A large "POWER" watermark is visible in the background.


Attention:
When you press the WLAN to connect to the network, the cell phone may notify you: "WLAN has no internet access". Tap and choose "Stay connected" > go next step.

8.2.2 Option 2 - Connection Via LAN

1. Plug in the wired cable to the RJ45 Ethernet, the device will show on the app in about 10 seconds.
(Note: the cell phone and the device must be in the same network)


8.2.3 Option 3 - Bluetooth Pair

1. Open the 4STREAM App.
2. Choose the Bluetooth mode at the bottom of the music Source page of 4STREAM App.
(To activate the Bluetooth)
3. Open the Bluetooth on the mobile device.
4. Pair to device Bluetooth "SoundSystem".

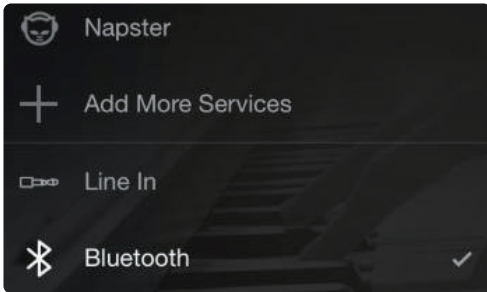

8.3 App Features

8.3.1 Device Setting

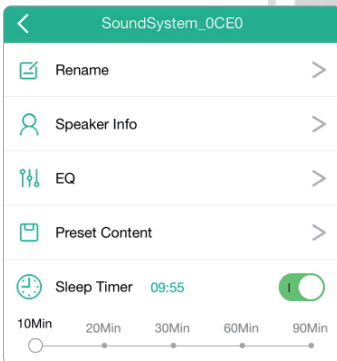

Rename: to customize the device name

Speaker info: you will see the device information like Mac ID, device, IP, SSID etc

EQ: open to control the device bass and treble

Preset content: you will see all the preset contents here


Sleep timer: Countdown to stop the music

8.3.2 To Play Local Storage Music

-Click the “My Music” on the application and choose the music ready there. NOTES: the iOS based devices have blocked the access to iTunes library.


8.3.3 To Play Music From NAS

Please note that our system only support NAS with DLNA feature.

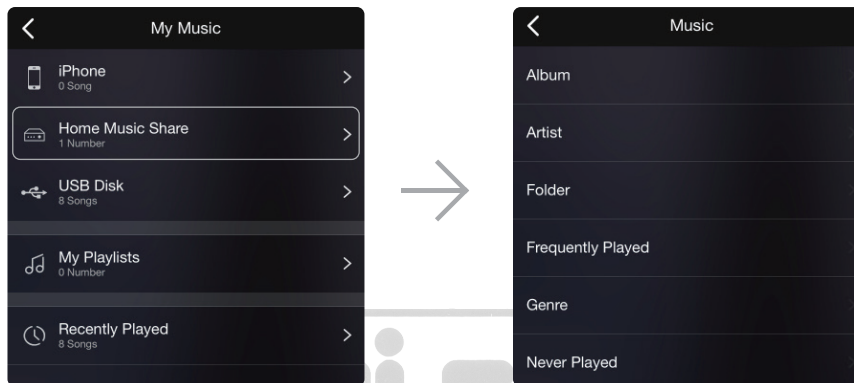


8.3.4 To Play in Line in Mode

- Connect the RCA cables to the TV or other audio sources.
- Choose line in mode on the application or remote control.




8.3.5 To Play in Optical in Mode

- Connect the Optical cable to the audio source
- Choose optical in mode on the application or remote control





8.3.6 To Play in Bluetooth Mode

- Choose the Bluetooth mode on the application or remote control, the LED will change to blue.
- Open the Bluetooth on your cellphone/tablet.
- Pair the device Bluetooth (SoundSystem) and play.



8.4 Streaming Services


To use the online streaming services, iHeartRadio, Spotify, Tidal, Qobuz and Deezer may need to register account at the service provider platform.

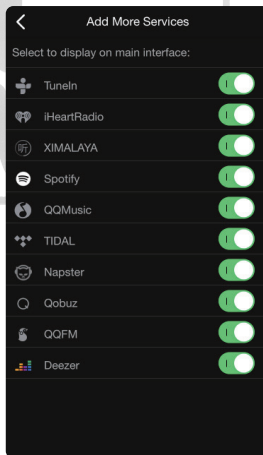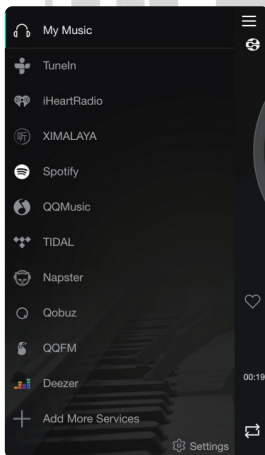

8.4.1 Spotify


To use Spotify, you have to own spotify premium account.

You will find the device in the device list on the Spotify application and choose the device you want to play.

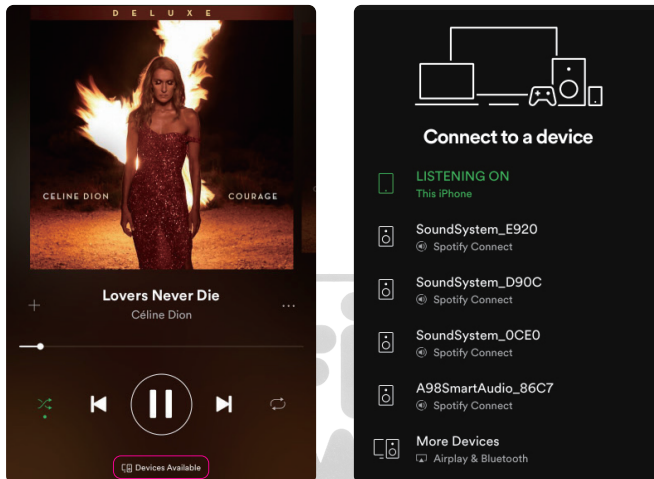



8.4.2 AirPlay

The device Supports AirPlay1, You can choose the AirPlay and Play Music.




8.4.3 Qplay

Our devices support QQ music using the Qplay protocol, you have to turn on the Qplay in the QQ music player setting and then find the device in the Qplay list.

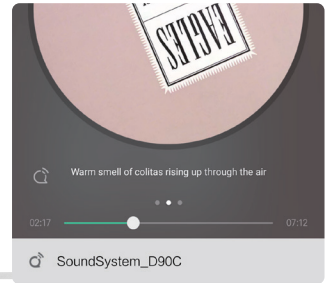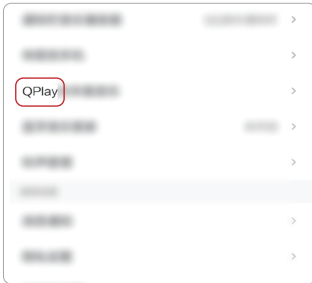

8.5 Multiroom and Multizone

Users can group multiroom and multizone on the Application, for example you can group device 1,2,3 and 4 together and play same music in sync, or group device 1 and 2 as zone A and device 3 and 4 as zone B, and play different music in zone A and zone B.

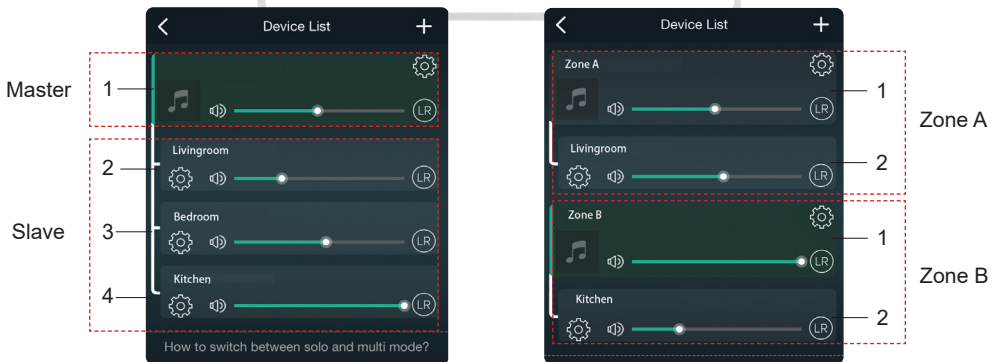


8.6 Left and Right Channel

Users can choose the right channel or left channel or stereo mode on the application, or choose left channel on device A and choose right channel on device B, and group them together and play in sync to make stereo.

8.7 Preset

There are 6 buttons on the remote control, users can preset play lists (only the lists with speaker icon can preset) on the application from 1~6 for example, then when you press button 1 on the remote, the preset list 1 will play. (Users can preset 10 playlists on the application, but the remote control can only save from 1-6).

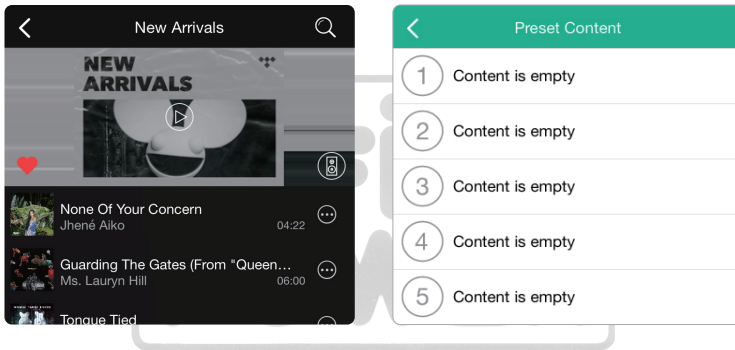

8.8 Source Mode Change

Method 1: change on application


Users can change play mode on the application, WiFi, Bluetooth, Line input, optical input and USB. To change from Bluetooth/line input/Optical input/USB to WiFi, only need choose the online streaming services such as Tidal, Qobuz or Spotify or cell phone local storage music or any music via DLNA or UPnP streaming.

8.9 Restore Factory Setting

Two methods to restore device to factory setting.




Method 1-long press the reset button on the device for 8-10seconds.

Method 2-go for "App setting-speaker info-restore factory setting".

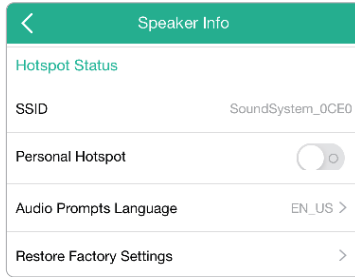

8.10 Firmware Update

The application will notify you in app when there is a new fireware version available. It's recommended to update fireware whenever available as this might not only correct bugs or improve security, but also can add new features or services.




9. Play on PC

There are several tools to play music from the PC

9.1 To play music from iTunes on Mac and Windows PC

Our devices can stream audio sources from local storage, media library in Mac and Windows PC and online services from iTunes. Users can easily play and switch music, control volume and choose the audio devices to group and upgroup the audio devices.

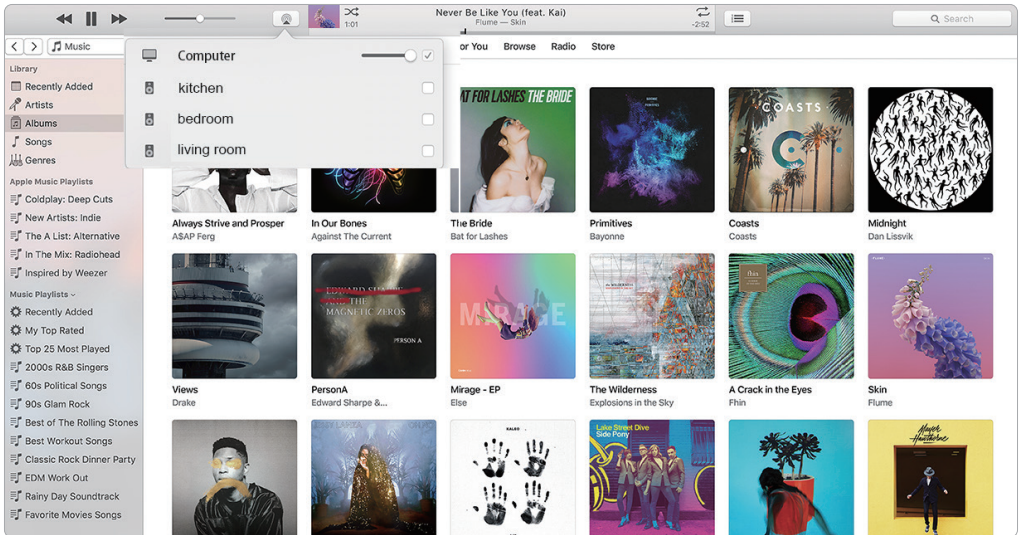

9.2 To play music from Windows PC via Foobar2000

Our devices support UPnP protocol, with the popular foobar2000, you can play music from Windows PC to our devices. Please follow the steps below:

1. Download the foobar2000 and install it.
2. Refer to the doc how to add UPnP component at our website download column.
3. Refer the link below how to add UPnP component http://wiki.hydrogenaud.io/index.php?title=Foobar2000:How_to_install_a_component
4. Restart the foobar2000, then check: Library>configure>output>device, you will see the PLAYER in device option column.
5. Choose the device to play the music.

foobar2000 v1.4

File Edit View Playback Library Help

New Playlist

Play...	Artist/album	Track ...	Title / track artist	Dura...
	Blue - One Love	07	U Make Me Wanna	3:50
	The Beatles - Beatles - Ballads		Beatles - Hey Jude	7:04
	? - ?		Beatles - Let It Be	3:52
	The Beatles - Beatles - Ballads		Beatles - Yesterday	2:04
	Bob Dylan - ?		Blowing In The Wind	2:49
	The Eagles	00	California Hotel	7:14
	Michael Jackson - King Of Pop		Heal The World	4:32
	Pink - The Truth About Love		Just Give Me A Reason	4:03
	michael jackson - asian hits	04	beat it	4:19
	Michael Jackson - Dangerous		Dangerous	7:00
	Pitbull,Marc Anthony - Planet Pit		Rain Over Me	3:52
	Avril Lavigne - Let Go		Tomorrow	3:49

Preferences: Output

Components

- Display
- Keyboard Shortcuts
- Media Library
 - Album List
- Networking
- Playback
 - Decoding
 - DSP Manager
 - Output**
- Shell Integration
- Tools
 - ReplayGain Scanner
 - Tagging
- Advanced

Device

SoundSystem_E920

Buffer length

1000 ms

Warning: setting too low buffer length may cause some visualization effects to stop working.

Output format

Output data format: 16-bit Dither

Refer to your hardware specifications for preferred output bit depth; using bit depth above your hardware capabilities will only result in degraded performance.

Reset all Reset page OK Cancel Apply

Scan the QR Codes Below for More



www.arylic.com



4STREAM App



Facebook: arylicme



YouTube: Arylic

Support and After Service: info@arylic.com

FAQ

Q: Do your devices support airplay and third-party DLNA apps?

A: Yes. They support airplay and third-party apps like BubbleUPNP...

Q: How many zones can you group in one system?

A: 12 rooms is the maximum, while 8 zones are recommended.

Q: What distance can your wireless audio system cover?

A: Once the system is connected to your WiFi router, you can stream your music anywhere there is a WiFi signal.

Q: Can it play high resolution music?

A: Yes. Our devices can play APE and FLAC within the normal bit rate range. They also support decoding 24bit/192kHz music files.

Q: How many languages do you support?

A: Our devices will auto-detect your mobile device language and change automatically. Currently, we support English, French, German, Spanish, Chinese, Portuguese, Korean and Japanese and more on the way.

Q: What online music services do you support?

A: Spotify, Deezer, Quboz, Tidal, iHeartRadio, TuneIn, Napster, and more, with more pending.

Q: Can I play local music?

A: Yes. You can play music from "MY MUSIC" on the application from local storage devices such as mobile device storage, USB thumb drives and NAS.

Q: Can the device work with Windows devices?


A: The Windows application is not available at the moment, but on the Windows PC, users can use iTunes, Foobar2000 and Spotify connect.

Q: Can all music sources play in multiroom mode?


A: Yes, the online streaming music, line input and Bluetooth all can play multiroom mode.

Q: Does your device support Google Assistant or Alexa?

A: Our devices don't support Alexa, yet through Bluetooth, our device can work with Google Assistant.

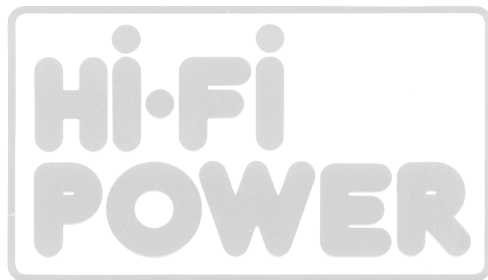

HOME &
PROFESSIONAL
AUDIOVISUAL

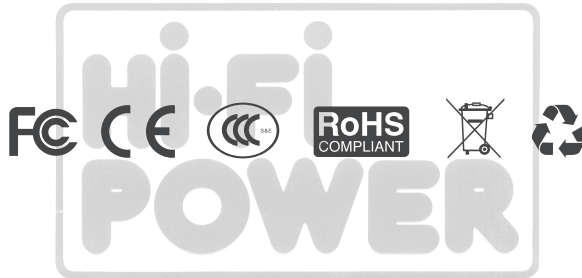

@Copyright 2020 by Arylic. All Rights Reserved.

The information contained in this guide is believed to be accurate and reliable. Arylic assumes no responsibility for any errors contained in this guide. Arylic reserves the rights to make changes in the specifications and/or design of the above mentioned product without prior notice. The diagrams contained in this guide may also not fully represent the product that you are using and they are for illustration purposes. Arylic assumes no responsibility for any differences between the product mentioned in this guide and the product you may have.